



**POGONSKI MOTOR
UGRAĐEN U GLAVU MAŠINE**



OV 514-240 DD

Global OV 500/OV 500 DD Serija OVERLOVKA

OV 500 SERIJA

Overlovke sa automatskim podmazivanjem i podesivim diferencijalnim transportom.

OV 500 DD SERIJA

Overlovke sa automatskim podmazivanjem, podesivim diferencijalnim transportom i pogonskim motorom ugrađenim u glavu mašine..

TEHNI KE SPECIFIKACIJE

BRZINA ŠIVENJA
8000 u/min

TRANSPORT
diferencijalni

VISINA DIZANJA STOPICE
OV serija 6 mm
OV 515-558 8 mm


TIP IGLE
B-27

**BROJ IGALA /
BROJ KONACA**
504 : 1 igla / 3 konca
514 : 2 igle / 4 konaca
515 : 2 igle / 5 konaca

Global OV 500 Series

OVERLOCK MACHINES

GLOBAL

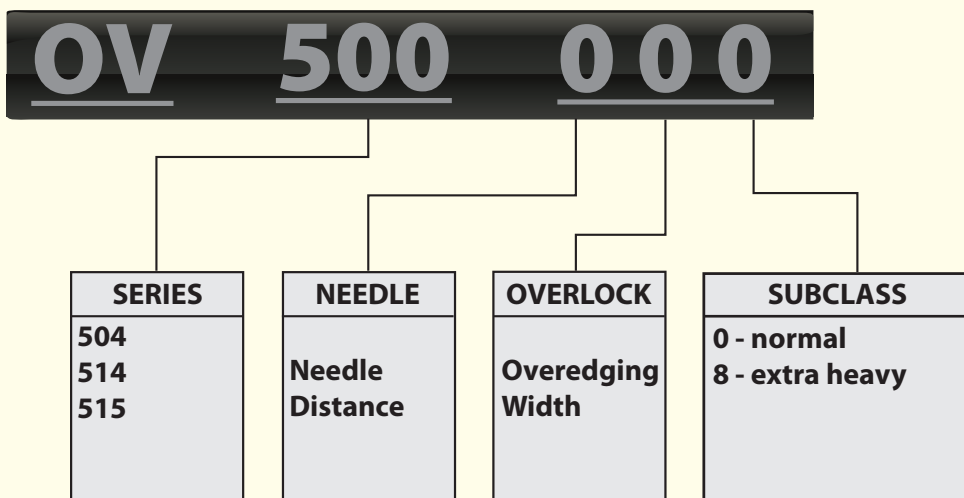

SPECIFICATIONS OV 500 SERIES

TYPE MODEL	STITCH TYPE	NUMBER OF NEEDLES	NUMBER OF THREADS	NEEDLE DISTANCE MM	OVEREDGING (MM)		STITCH LENGTH MM	DIFFERENTIAL FEED RATIO	PRESSER FOOT LIFT (MM)	MAX. SEWING SPEED
					WIDTH	WIDTH OVERAL				
OV 504-040		1	3	—	4	4	3.8	0.7 ~ 2	6	8000
OV 514-240		2	4	2	4	6	3.8	0.7 ~ 2	6	7500
OV 515-350		2	5	3	5	8	3.8	0.7 ~ 2	6	7000
OV 515-550		2	5	5	5	10	3.8	0.7 ~ 2	6	7000
OV 515-558		2	5	5	5	10	4.5	0.6 ~ 1.6	8	5500

SPECIFICATIONS OV 500 DD SERIES with direct drive Ho Hsing servo motor and controlbox

TYPE MODEL	STITCH TYPE	NUMBER OF NEEDLES	NUMBER OF THREADS	NEEDLE DISTANCE MM	OVEREDGING (MM)		STITCH LENGTH MM	DIFFERENTIAL FEED RATIO	PRESSER FOOT LIFT (MM)	MAX. SEWING SPEED
					WIDTH	WIDTH OVERAL				
OV 504-040 DD		1	3	—	4	4	3.8	0.7 ~ 2	6	8000
OV 514-240 DD		2	4	2	4	6	3.8	0.7 ~ 2	6	7500
OV 515-350 DD		2	5	3	5	8	3.8	0.7 ~ 2	6	7000
OV 515-550 DD		2	5	5	5	10	3.8	0.7 ~ 2	6	7000
OV 515-558 DD		2	5	5	5	10	4.5	0.6 ~ 1.6	8	5500

OV 500 SERIES

INDUSTRIAL SEWING MACHINES